

Publisher's Note: "Generation of integer and fractional perfect vortex beams using all-dielectric geometrical phase metasurfaces" [Appl. Phys. Lett. 120, 201701 (2022)]

Cite as: Appl. Phys. Lett. 120, 229901 (2022); <https://doi.org/10.1063/5.0100473>

Submitted: 24 May 2022 • Published Online: 03 June 2022

Kaixiang Cheng, Zexu Liu, Zheng-Da Hu, et al.



View Online



Export Citation



CrossMark

ARTICLES YOU MAY BE INTERESTED IN

[Generation of integer and fractional perfect vortex beams using all-dielectric geometrical phase metasurfaces](#)

Applied Physics Letters 120, 201701 (2022); <https://doi.org/10.1063/5.0094549>

[Scanning nitrogen-vacancy magnetometry down to 350 mK](#)

Applied Physics Letters 120, 224001 (2022); <https://doi.org/10.1063/5.0093548>


[Mode-selective single-dipole excitation and controlled routing of guided waves in a multi-mode topological waveguide](#)

Applied Physics Letters 120, 221702 (2022); <https://doi.org/10.1063/5.0083989>



Integrates all
Instrumentation + Software
for Control and Readout of
Superconducting Qubits

[visit our website >](#)

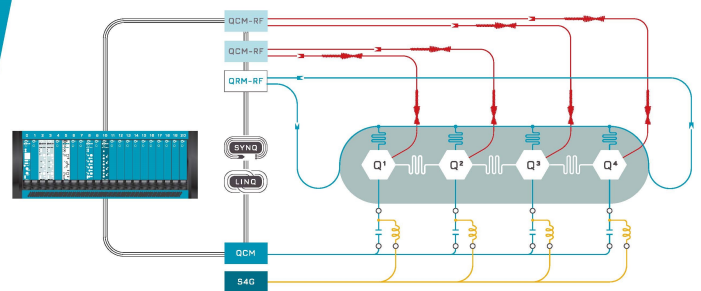

Publisher's Note: "Generation of integer and fractional perfect vortex beams using all-dielectric geometrical phase metasurfaces" [Appl. Phys. Lett. 120, 201701 (2022)]

Cite as: Appl. Phys. Lett. **120**, 229901 (2022); doi: [10.1063/5.0100473](https://doi.org/10.1063/5.0100473)

Submitted: 24 May 2022 · Published Online: 3 June 2022



View Online



Export Citation



CrossMark

Kaixiang Cheng,¹ Zexu Liu,¹ Zheng-Da Hu,¹ Guoyang Cao,¹ Jingjing Wu,¹ and Jicheng Wang^{1,2,a)} 

AFFILIATIONS

¹School of Science, Jiangsu Provincial Research Center of Light Industrial Optoelectronic Engineering and Technology, Jiangnan University, Wuxi 214122, China

²State Key Laboratory of Applied Optics, Changchun Institute of Optics, Fine Mechanics and Physics, Chinese Academy of Sciences, Changchun 130033, China

^{a)} Author to whom correspondence should be addressed: jcwang@jiangnan.edu.cn

<https://doi.org/10.1063/5.0100473>

This article was originally published online on 18 May 2022 with errors throughout. Equations (3) and (4) have been corrected as follows:

$$\varphi_{\text{spiral}} = \text{larctan}\left(\frac{ey}{x}\right), \quad (3)$$

$$\varphi_{\text{axicon}} = -\frac{2\pi NA}{\lambda} \sqrt{x^2 + e^2 y^2}, \quad (4)$$

On page 4, the sentence beginning "The difference..." has been corrected as "The difference is mainly caused by the near-field coupling of adjacent nanopillars with different orientations. Due to the simulation of the unit-cell based on periodic boundary condition, which

assumes a uniform array and without this problem, the simulated efficiency of the unit-cell is higher than the whole metasurface." Also on page 4, the last paragraph, the first sentence has been corrected as "To generate an elliptical PV beam, we set ellipticity e as 0.7 and use 830 nm incidence in the simulation. Figures 4(d)–4(f) show the simulated intensity profile of the elliptical PV beams at the focal plane ($z = 14 \mu\text{m}$) with $l = 1, 2,$ and 3 . On page 6, "Scale bar: $4 \mu\text{m}$." was added to the end of the Fig. 4 caption.

All online versions of this article were corrected on 23 May 2022; the article is correct as it appears in the printed version of the journal. AIP Publishing apologizes for these errors.